





**GORE® DRYSEAL**  
Flex Introducer Sheath

# ADVANCING CARE THROUGH ACCESS


A new standard of flexibility  
and kink resistance to treat  
more challenging anatomies.

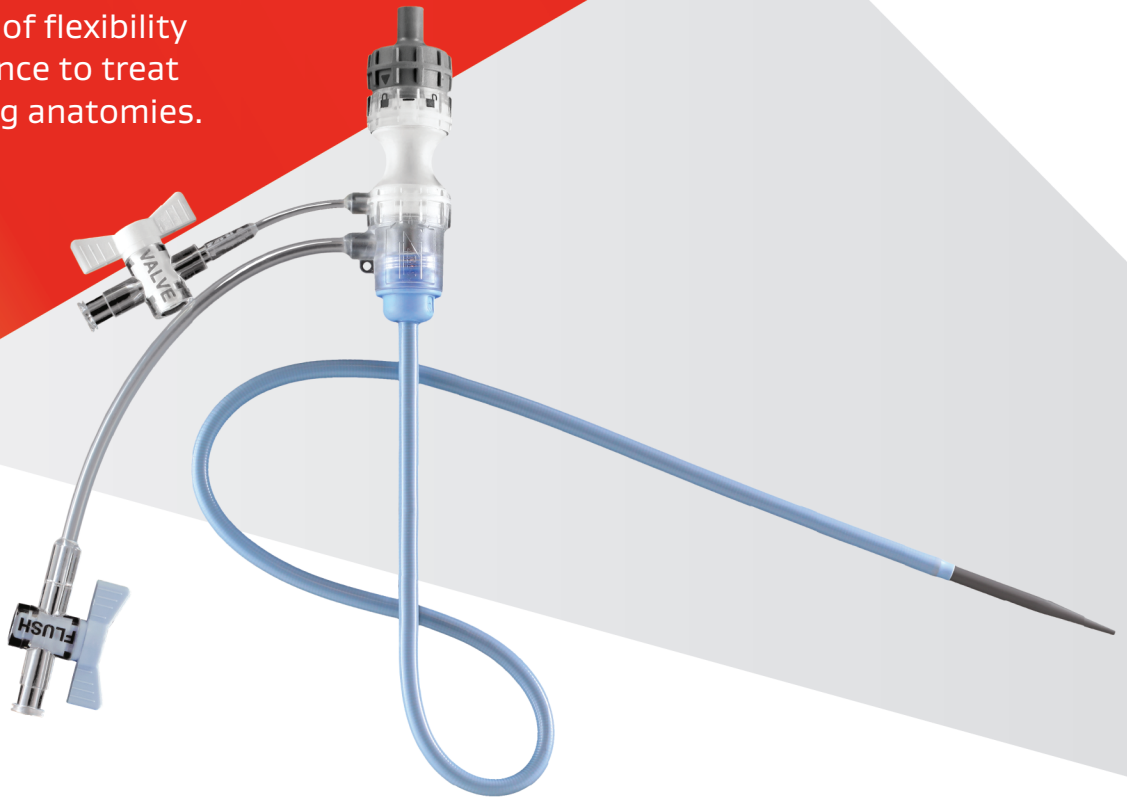

*Together, improving life*

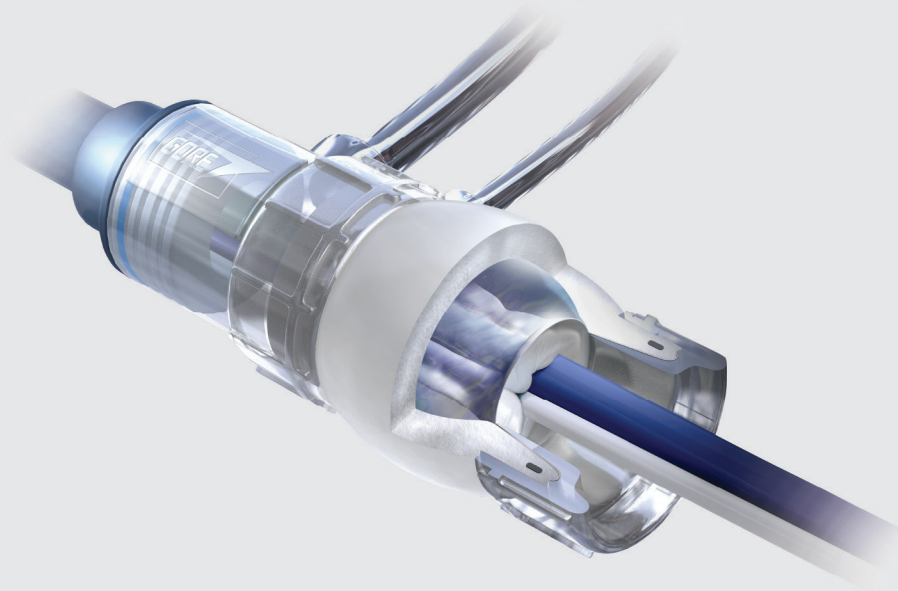

Hydrophilic coating and enhanced flexibility provide exceptional access to challenging anatomies and branch vessels.

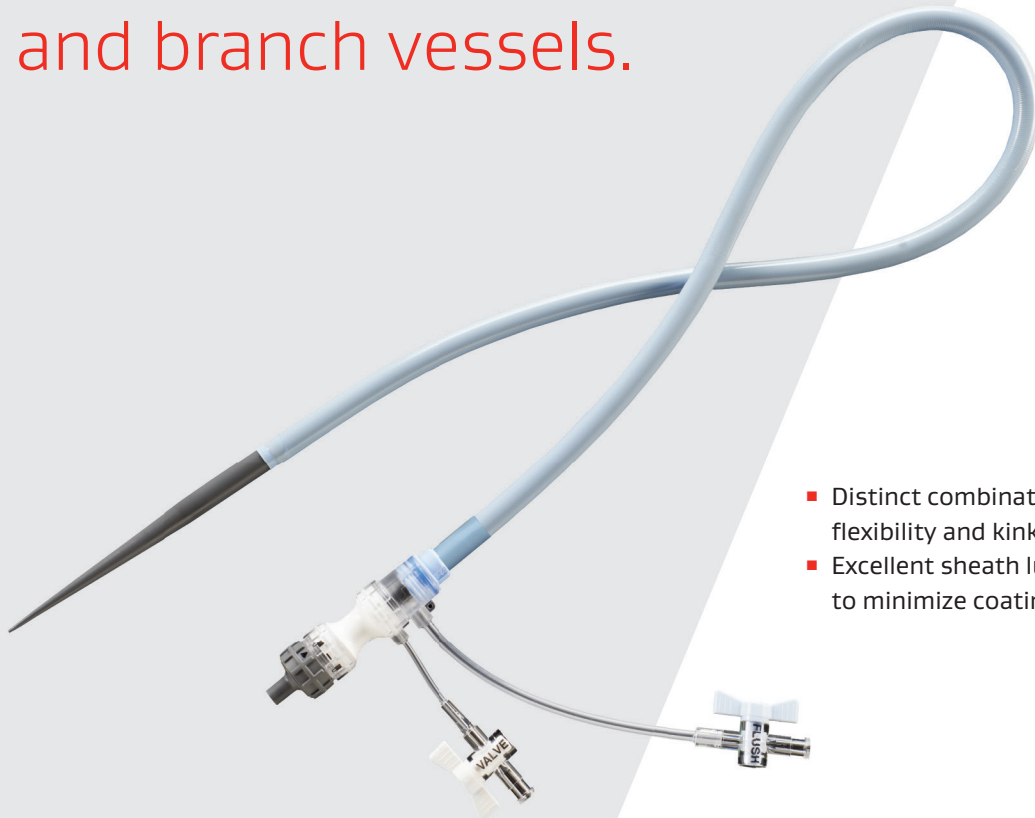


- Distinct combination of enhanced flexibility and kink resistance
- Excellent sheath lubricity designed to minimize coating particulation

# Exclusive GORE® DRYSEAL Valve enables introduction of multiple devices with proven hemostasis control



**Deliver with ease and minimize blood loss;  
care for more patients with complete confidence**

- Accommodate multiple wires and catheters through the valve simultaneously with minimal blood loss
- Facilitate hemostasis without intraprocedural manipulation of the valve

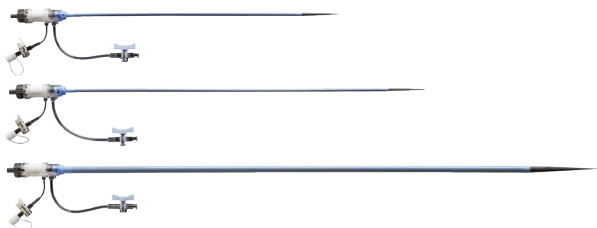

**Optimized profile and new configurations provide  
tailored delivery options for a broader range of  
patient anatomy**


- Decreased sheath wall thickness for larger inner diameter and decreased outer diameter
- Additional working lengths of 33/45/65 cm to care for more patients



**Engineered for use with our endovascular portfolio**

- 12 Fr x 45 cm configuration designed for and tested specifically with the GORE® EXCLUDER® Iliac Branch Endoprosthesis

The GORE® DRYSEAL Flex Introducer Sheath with hydrophilic coating consists of an introducer sheath with GORE® DRYSEAL Valve attached, a dilator and a 2.5 ml valve inflation syringe.

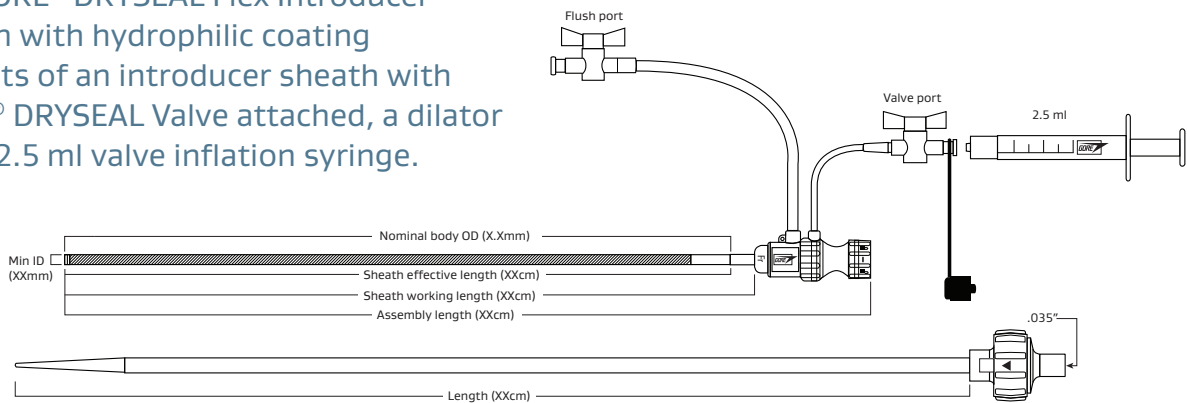

| Catalogue number | Sheath size (Fr) | Length (cm) | Minimum sheath ID (mm) | Nominal body OD (mm) | Sheath effective length (cm) | Sheath working length (cm) | Assembly length (cm) | Dilator length (cm) |
|------------------|------------------|-------------|------------------------|----------------------|------------------------------|----------------------------|----------------------|---------------------|
| DSF1033          | 10               | 33          | 3.3                    | 4.0                  | 32                           | 33                         | 39                   | 42.4                |
| DSF1045          | 10               | 45          | 3.3                    | 4.0                  | 44                           | 45                         | 51                   | 54.4                |
| DSF1065          | 10               | 65          | 3.3                    | 4.0                  | 64                           | 65                         | 71                   | 74.4                |
| DSF1233          | 12               | 33          | 4.0                    | 4.7                  | 32                           | 33                         | 39                   | 42.9                |
| DSF1245          | 12               | 45          | 4.0                    | 4.7                  | 44                           | 45                         | 51                   | 55.1                |
| DSF1265          | 12               | 65          | 4.0                    | 4.7                  | 64                           | 65                         | 71                   | 74.9                |
| DSF1433          | 14               | 33          | 4.7                    | 5.3                  | 32                           | 33                         | 39                   | 43.7                |
| DSF1465          | 14               | 65          | 4.7                    | 5.3                  | 64                           | 65                         | 71                   | 75.7                |
| DSF1533          | 15               | 33          | 5.0                    | 5.6                  | 32                           | 33                         | 39                   | 43.9                |
| DSF1633          | 16               | 33          | 5.3                    | 6.1                  | 32                           | 33                         | 39                   | 44.2                |
| DSF1665          | 16               | 65          | 5.3                    | 6.1                  | 64                           | 65                         | 71                   | 76.2                |
| DSF1833          | 18               | 33          | 6.0                    | 6.7                  | 32                           | 33                         | 39                   | 45.0                |
| DSF1865          | 18               | 65          | 6.0                    | 6.7                  | 64                           | 65                         | 71                   | 77.0                |
| DSF2033          | 20               | 33          | 6.7                    | 7.5                  | 32                           | 33                         | 39                   | 45.5                |
| DSF2065          | 20               | 65          | 6.7                    | 7.5                  | 64                           | 65                         | 71                   | 77.5                |
| DSF2233          | 22               | 33          | 7.3                    | 8.2                  | 32                           | 33                         | 39                   | 46.2                |
| DSF2265          | 22               | 65          | 7.3                    | 8.2                  | 64                           | 65                         | 71                   | 78.0                |
| DSF2433          | 24               | 33          | 8.0                    | 8.8                  | 32                           | 33                         | 39                   | 46.7                |
| DSF2465          | 24               | 65          | 8.0                    | 8.8                  | 64                           | 65                         | 71                   | 78.7                |
| DSF2633          | 26               | 33          | 8.7                    | 9.5                  | 32                           | 33                         | 39                   | 47.5                |
| DSF2665          | 26               | 65          | 8.7                    | 9.5                  | 64                           | 65                         | 71                   | 79.5                |

Consult Instructions for Use  
[eifu.goremedical.com](http://eifu.goremedical.com)

**INDICATIONS FOR USE IN THE U.S.:** The GORE® DRYSEAL Flex Introducer Sheath is intended to be inserted in the vasculature to provide a conduit for the insertion of endovascular devices while minimizing blood loss associated with such insertions. **CONTRAINDICATIONS:** There are no known contraindications for this device. Refer to *Instructions for Use* at [eifu.goremedical.com](http://eifu.goremedical.com) for a complete description of all applicable indications, warnings, precautions and contraindications for the markets where this product is available. Rx Only

Products listed may not be available in all markets.

GORE, Together, improving life, DRYSEAL, EXCLUDER and designs are trademarks of W. L. Gore & Associates.  
 © 2020, 2024 W. L. Gore & Associates, Inc. 231302839-EN JANUARY 2024

W. L. Gore & Associates, Inc.  
[goremedical.com](http://goremedical.com)

Asia Pacific +65 67332882 Australia/New Zealand 1800 680 424 Europe 00800 6334 4673  
 United States Flagstaff, AZ 86003 800 437 8181 928 779 2771

